



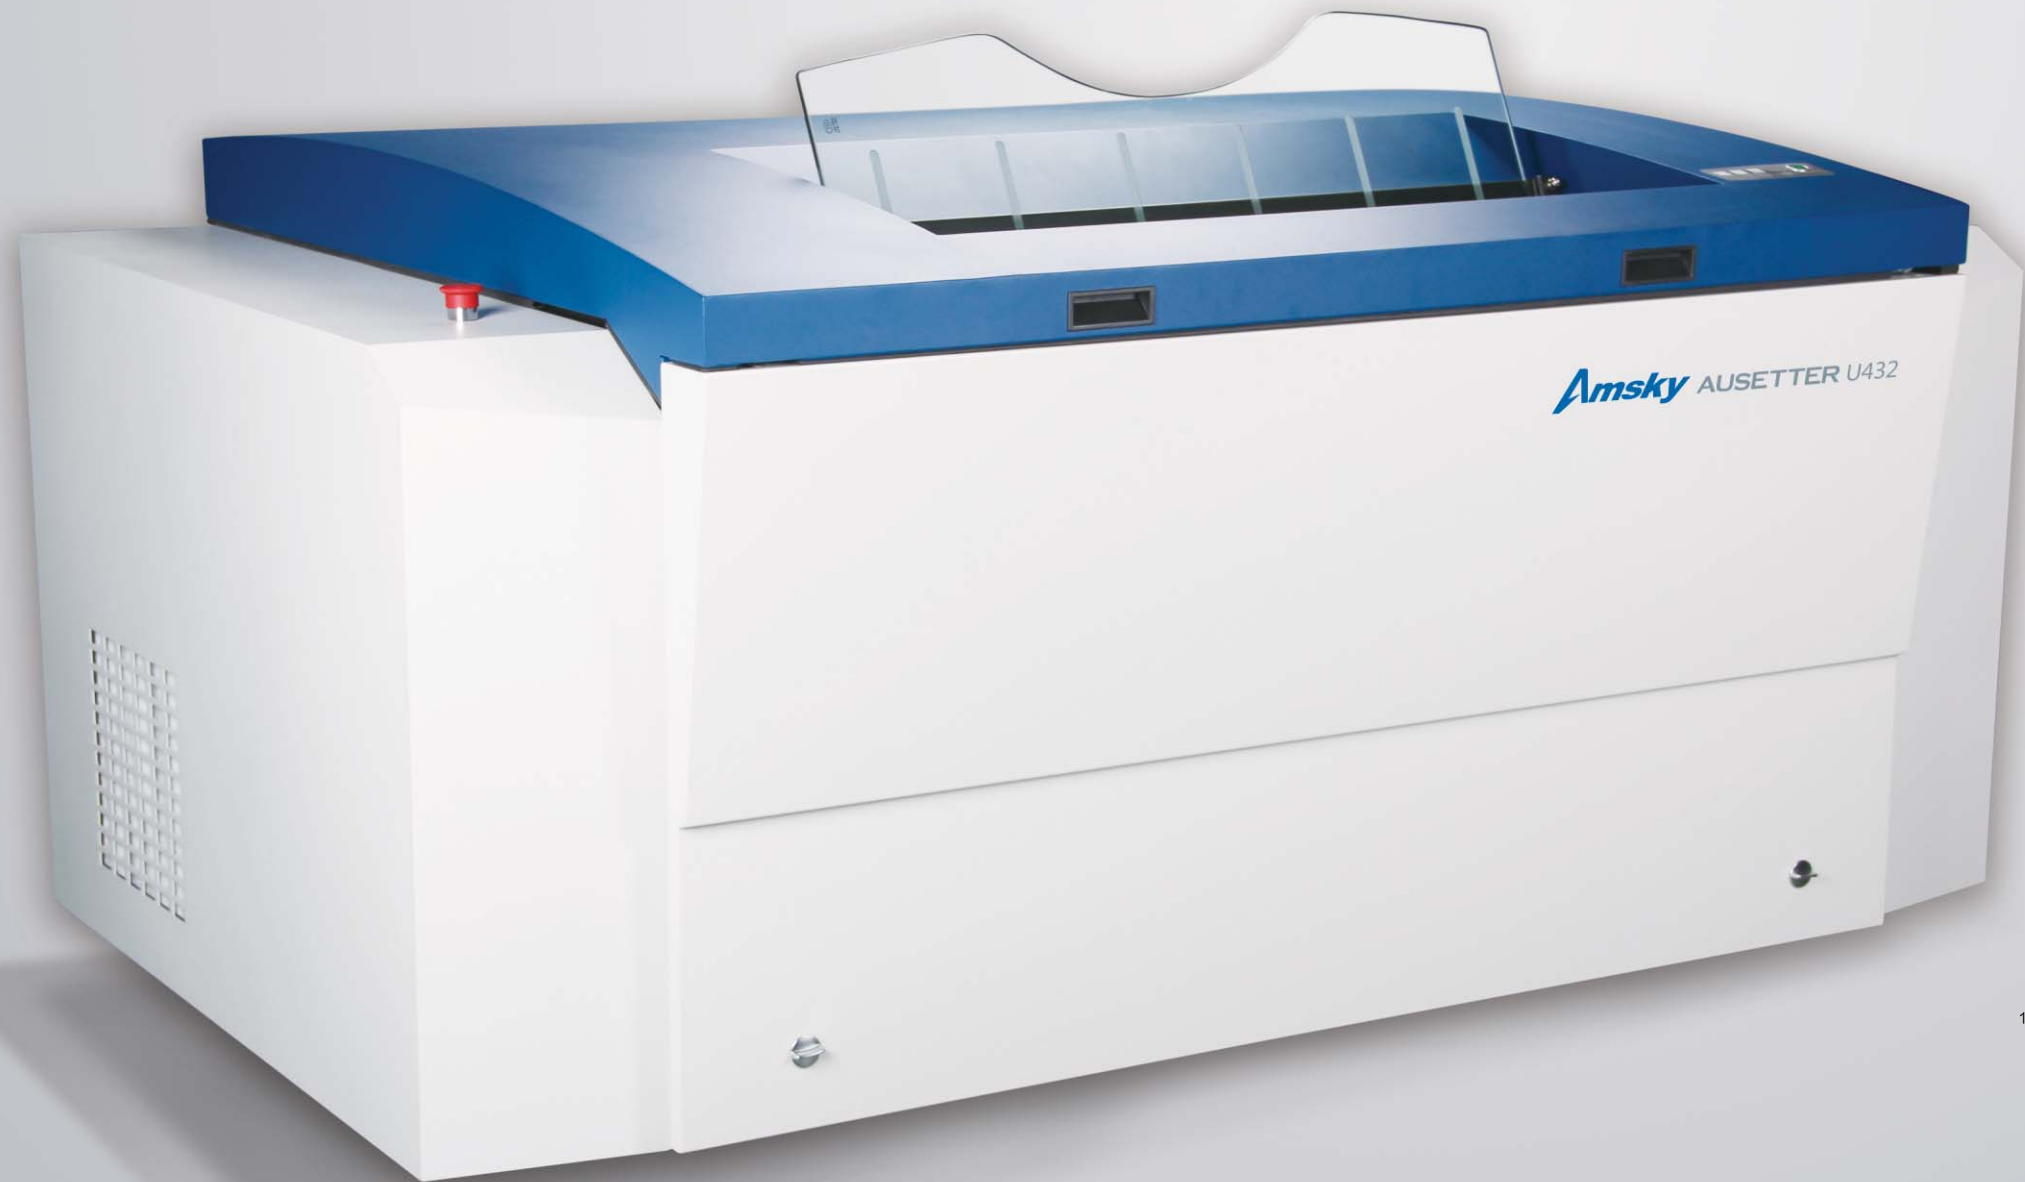

The first necessity of quick short-run printing

Amsky Ausetter 400 series


Excellent output quality, highly reliable stability;
Less space occupied, more flexible.

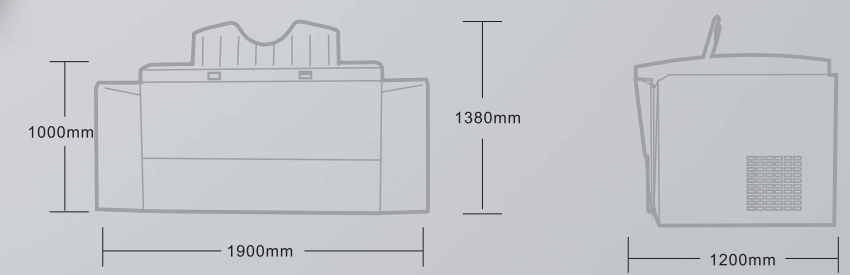

Amsky Ausetter 400 series

CTP specialized in quick short-run printing for small business

Maximum size of plate: 800mm*660mm.
Features: Small volume, high stability and perfect output quality.
UV plate and thermal plate are available for you to lower production cost.
Furthermore, to improve the production efficiency, 32 channels, 48 channels and 64 channels laser are provided according to different printing speeds.

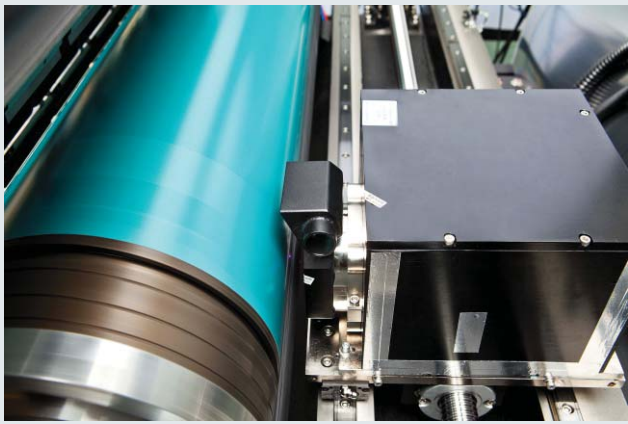

Ausetter 400 Series Technical Specifications

Model	U 424	U 432	U 448	T 424	T 432	T 448
Exposing Method	External Drum					
Imaging System	24-channel	32-channel	48-channel	24-channel	32-channel	48-channel
	Discrete 400-410nm laser			Discrete 830nm laser		
Output Speed	16 plates/hour	22 plates/hour	28 plates/hour	16 plates/hour	22 plates/hour	28 plates/hour
	800×660mm 2,400dpi					
Plate Size	Max.800×660mm, Min. 400×300mm					
Exposing Size	Max. 800×646mm					
Plate Type	UV plate, high-sensitive PS plate			Thermal plate		
Plate Thickness	0.15mm-0.3mm					
Resolutions	2,400dpi					
Repeatability	± 5 μ m(Continuous exposure over four times on the same plate with a temperature of 23℃ and 60% RH)					
Interface	USB2.0					
Plate Loading	First manual, then autoloader					
Net Weight	800KG					
Device Size	1,900×1,200×1,000mm (W×D×H)					
Power Supply	Single phase:200V-240V; Power:4KW					
Environment	Recommended temperature: 21-25℃ Allowed temperature: 18-26℃ Humidity: <70%					